SENTROL

1275 Series

3/8" Diameter Wing-Fit Recessed With Wire Leads Magnetic Contacts

Gap distance	Closed loop	SPDT
Regular 1/2"	1275	1277
Wide 1"	1275W	1277W

Color	White	Mahogany brown
Quantity	10	

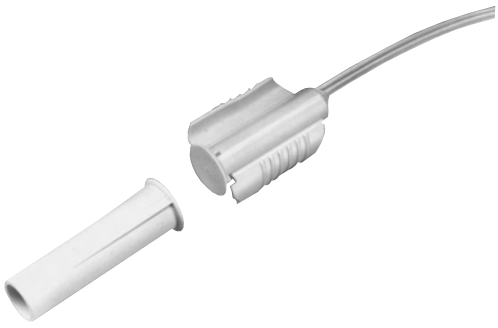

1275-N

0 46188 02018 8

100% TESTED

c UL us LISTED

1275 Series Press Fit
Magnetic Contacts

Installation Instructions

Drill 3/8" x 1 3/8" holes for switch and magnet. Test for continuity; connect switch into loop. Press switch and magnet into their respective holes.

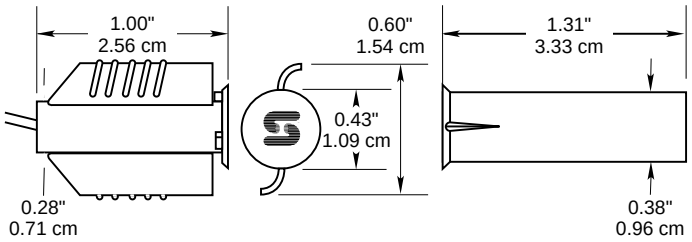

*** Note: Wings compress to .375" dia.** **Magnet Part No. 1924 (Included)**

UL Specifications

**European Union Specifications: 48 VAC/DC Max., 0.5 Amp

Part Number	Loop Type	Electrical Configuration	Gap Distance (Up To)*
1275	Closed	N.O.	1/2"
1275W	Closed	N.O.	1 1/4"
1277	Open or Closed	SPDT	1/2"
1277W	Open or Closed	SPDT	1 1/4"

****FORM A (1275, 1275W)**
Voltage: 100 VAC/DC Max
Current: 0.5 A Max
Power: 7.5 W Max

FORM C (1277, 1277W)
Voltage: 30 VAC/DC Max
Current: 0.25 A Max
Power: 3.0 W Max

*** Gap Specifications are nominal and may vary ± 20%. Gap Specifications are for switch to make. Break distance is approximately 1.1 to 1.5 times make.**

interlogix
SECURITY & LIFE SAFETY GROUP

Technical Service:

PK-0990 Rev F 10/01

Clearwater Tech - Phone: 800.894.0412 - Fax: 208.368.0415 - Web: www.clrwtr.com - Email: info@clrwtr.com